



FOR TMDXEVM667xL USERS

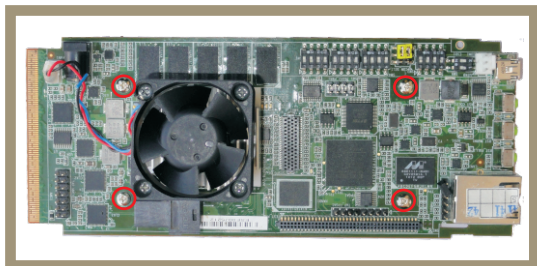


1

Remove four screws which hold stand-offs of TMDXEVM667xL and mount four “15mm Studs” provided with this kit at mentioned locations.

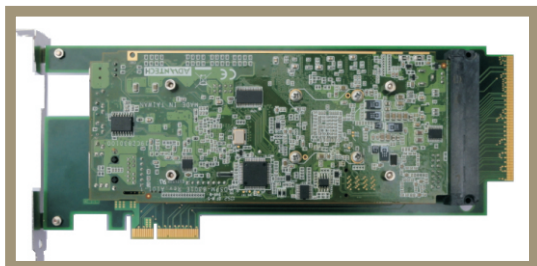


2

Insert TMDXEVM667xL into AMC socket connector provided on bottom side of TMDXEVMPCI board.

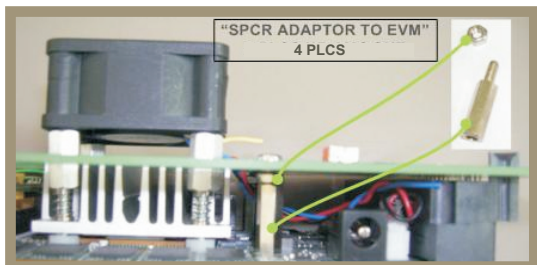

3


Insert “2mm Spacers” (Nuts) at 4 locations between TMDXEVMPCI and TMDXEVM667xL “15mm Studs” .

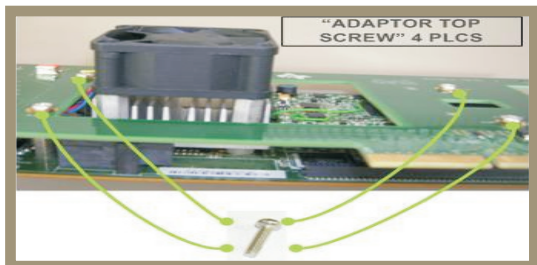

4

Mount all four “3mm Screws” on TMDXEVMPCI card.


FOR TMDXEVM667xLE USERS

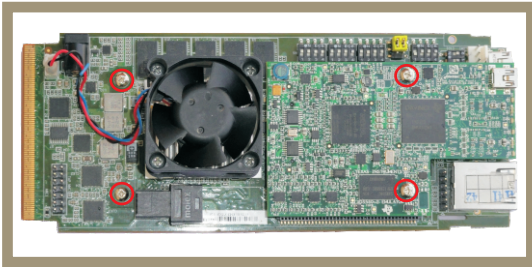

1


Remove four screws which hold stand-offs of TMDXEVM667xLE.

Mount two "15mm Studs" supplied with this kit near AMC edge connector.

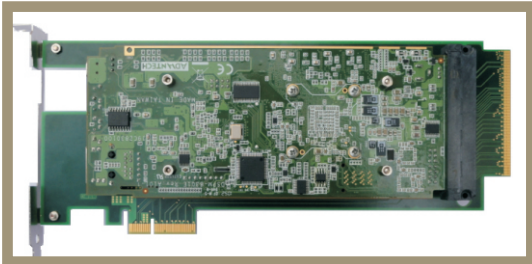


2

Insert TMDXEVM667xLE into AMC socket connector provided on bottom side of TMDXEVMPCI board.

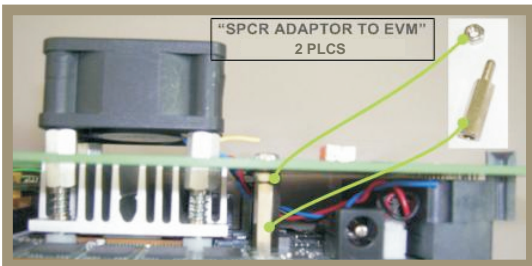


3

Insert "2mm Spacers" (Nuts) at 2 locations between TMDXEVMPCI and TMDXEVM667xLE "15mm Studs" .

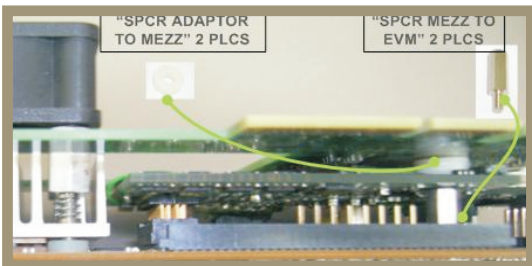

4

Insert "4mm Spacers" (White Nylon Spacers) at 2 locations between XDS560v2 Mezzanine Emulator and TMDXEVMPCI.

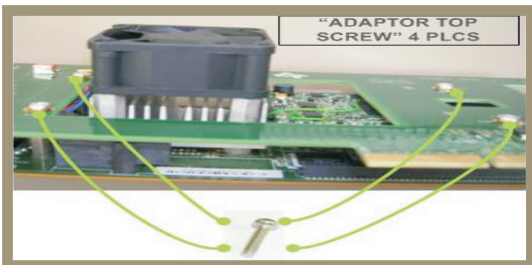

5

Mount all "3mm Screws" on TMDXEVMPCI card.